

# 如何在 Mac 上停用/啟用 SIP ?

## ⚙️ What is System Integrity Protection (SIP) ?

Start from Mac OS X El Capitan (10.11), a new security policy that applies to every running process, including privileged code and code that runs out of the sandbox. The policy extends additional protections to components on disk and at run-time, only allowing system binaries to be modified by the system installer and software updates.

## ⚙️ Why Tansee software need SIP to be disabled?


The feature "Customize iTunes Backup Location" in Tansee iPhone Message Transfer (Mac version) need the privilege to change a SIP protected folder in Mac.





## ⚙️ Is there any risk to disable SIP?

Tansee software will be no risk if you disabled SIP, but there will be potential risk if SIP is disabled. We strongly recommend you enable SIP after "Customize iTunes Backup Location" in Tansee software.
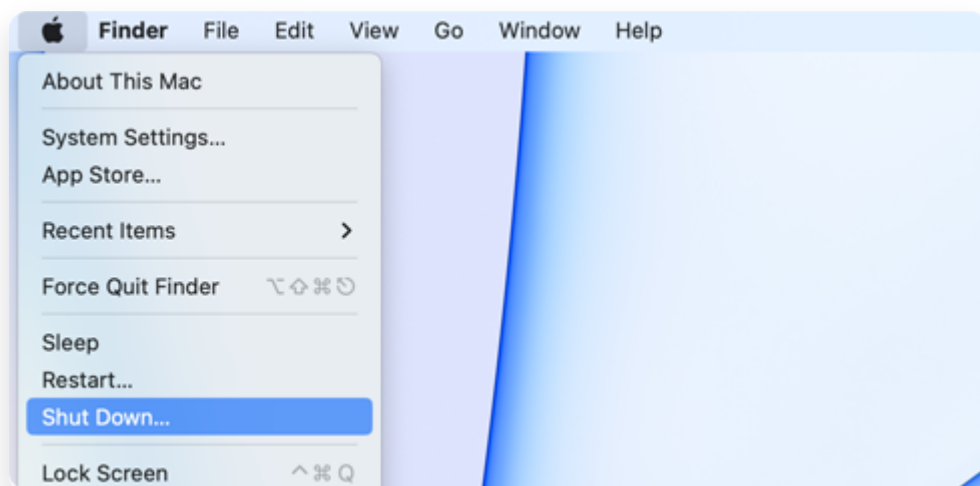
## How To Disable SIP on Mac?


**1** Turn off your Mac



**2** For Mac runs on Intel chip: Hold down Command  and  and press the Power button. Keep holding Command  and  until the Apple logo appears. For Mac runs on Apple Silicon: Keep holding the power button until the Apple logo appears.



Apple Silicon

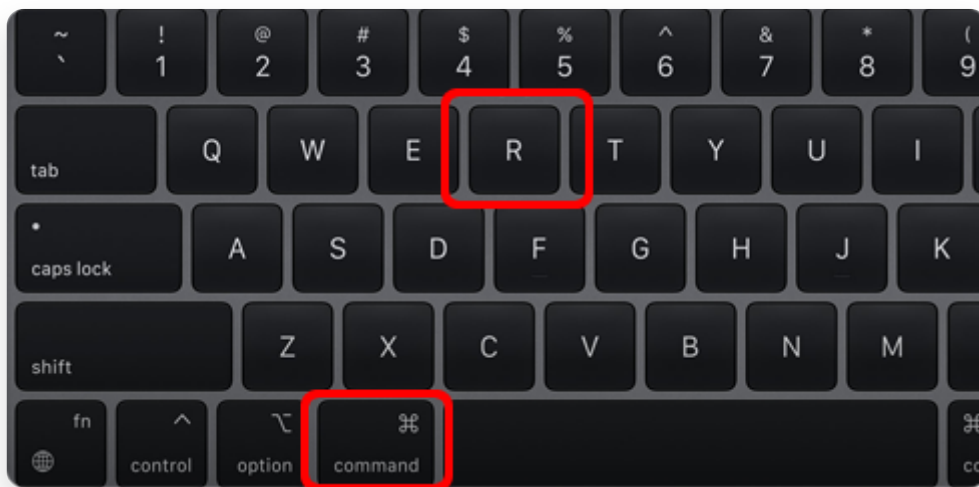

Intel Chip

- 3 Choose Utilities > Terminal, Enter the following command: **csrutil disable**



- 4 Reboot your computer, Try "Customize iTunes Backup Location" in Tansee software again

### How To Enable SIP on Mac?

Follow steps above, and type **csrutil enable** in step 3



© 2006-2024 Tansee, Inc

[首頁](#) [支援](#) [隱私政策](#) [聯盟伙伴](#)

[聯絡我們](#)